

2010 REDLINE PERFORMANCE BAR MANUAL



BEST KITEBOARDING

USER MANUAL

Thank you for purchasing a Best kite. Please read this manual carefully and in its entirety before using your new Best kite.

WARNING

Kiteboarding/kitesurfing/snowkiting are extreme sports. They have numerous inherent risks and dangers, and pose substantial risk of cuts, scrapes, bruises, broken bones, loss of limbs, loss of vision, paralysis, and other serious, permanent and disabling injuries and death to the rider and others. Some of the sources of these risks include but are not limited to:

- Being lifted by the kite and then dropped or slammed into the ground, snow, trees, rocks, buildings, piers, jetties and/or other structures or surfaces.
- Being dropped or slammed into other people and/or property.
- Contact with kite lines under tension, and/or watercraft.
- Drowning.
- Underwater conditions and/or objects such as sharp shells, broken glass, sand bars, shoals, reefs, oyster beds, and/or concrete.
- Contact with sea life such as sting rays, sharks, sea turtles, jelly fish, etc.
- Weather conditions and/or changes in weather conditions such as increasing or decreasing wind, waves, updrafts, lightning and/or water spouts.
- Equipment performance. Kiteboarding is a new sport. Kiteboarding equipment and safety gear are NOT 100% reliable. Safety designs and features are often new and unproven. Kites may behave unfavorably and unpredictably. Lines can twist, tangle, or break, resulting in serious injury and/or loss of control of the kite.

When using this product, you are responsible for your own safety and the safety of others around you. Never use this product as a flying device. Never touch flying lines when the kite is in use.

RELEASE OF LIABILITY AND ASSUMPTION OF RISK

DO NOT USE THIS PRODUCT UNLESS YOU AGREE WITH THE

FOLLOWING TERMS AND CONDITIONS:

Before using this product, the purchaser/user has carefully reviewed, understood and agrees to comply with the terms of this User Manual. Use of this product and any of its components involves certain inherent risks, dangers and hazards, which can result in serious personal injury or death. The purchaser/user of this product understands that the seller is not responsible for any damage to property or injury caused by negligent operation of this product by the purchaser/user, and the purchaser/user releases the seller from all such liability. In the event of your death or incapacity, this Agreement shall be effective and binding upon your heirs, next of kin, executors, administrators, assigns and representatives.

The purchaser/user of this product expressly assumes the risk of any and all bodily injury, death and/or liability which may result from the purchaser or user's participation in kiteboarding. The purchaser/user agrees to hold Ride Best, LLC harmless from any and all liability, and waive and release any and all claims or potential claims against Ride Best, LLC and any of its respective agents, affiliates, subsidiaries, employees, instructors, officers, directors, shareholders, suppliers and manufacturers in the event of any such bodily injury or death which may result from the purchase and/or use of Ride Best LLC (d/b/a Best Kiteboarding) products.

Redline Performance Bar:

Product Description:

The Redline Performance Bar combines the best features and safety systems from our 09 bar lineup into one unbeatable bar. With safety and set-up options simple enough for the absolute beginner to understand yet with enough versatility and hardcore build quality to satisfy even the most demanding experienced rider, it's guaranteed to set the standard for years to come.

The Redline Performance Bar uses our new 'Click-it' chickenloop quick-release, simply push up on the ergonomically shaped self locking cuff to activate the Redline safety and instantly depower your kite. Rebuilding the chickenloop after activation is just as easy, just push the chickenloop line home and snap the outer cuff shut.

With an integral swivel sitting on top of the chickenloop assembly untwisting your lines and swapping between hooked-in and unhooked riding just got a whole lot easier. This is the perfect bar for riders of all levels who demand the most reliable and predictable safety system but still need all the features our previous bars have had to offer.

A dual-depower center line with integral moulded stopper allows you to trim the bar position, taking the strain so you can concentrate on your next move. The Redline safety system passes directly through the center of the stopper ball, providing a safety override regardless of how you use the stopper.

A dual front line safety set-up ensures that your kite depowers safely and lands ready to be relaunched as quickly as possible. Riders who require to completely kill their kite can opt to use the rear line OSR handles instead of the chickenloop mounted Redline safety. Advanced riders can choose to use the suicide leash connection by clipping their safety over the chickenloop line.

Flying lines are 700lb rated, colour coded for easy set-up and proven to offer incredibly low stretch and amazing durability; the rear flying lines can be trimmed to allow compensation for your preferred bar position or when using the bar with kites from previous product years. An above the bar pull-pull trim strap provides easy depower trimming in flight.

One bar for all kites, the Standard has been set.

Redline Performance Bar Features:



A one piece, injection moulded quick release with push-to-release outer-cuff ensures reliable and easy safety system activation.

With no mechanical internal parts there's nothing to foul to inhibit safe operation, ensuring reassembly is just as fast and as easy as activation.



A drop forged alloy bar center replaces the swaged center bushings used on previous bars. With an oversized, smooth polished and elliptically flared center hole depower line wear is almost completely eliminated on the Redline Performance Bar. The new design also allows the EVA bar grip to run right up to the center hole, making unhooked kite control just that little bit more secure than before.



Our 3 into 1 Dual Depower stopper ball allows for all flying lines to pass through it giving you all the benefits of our well established stopper ball design bars as well as the safety and bypass functionality of our previous Redline bar design.



We have replaced the older snap-gate Karabiner design and replaced it with a lower profile, easier to hook and unhook spring gate design. Because the spring gate is self-tensioning and made from heavy chromed stainless, it'll be as smooth after a full season's use as it was the day you purchased it.



The Redline safety leash connects you directly to the front lines of your kite, allowing you to completely depower your kite. The Redline safety overrides the depower stopper ball automatically whenever you drop the bar or activate the 'Click-it' QR.




A low friction swivel, shaped with male/female fit for the underside of the bar, helps to keep everything locked in place when unhooking and makes untwisting your lines easier than ever before. Designed to be easy to clean the new swivel can be flushed out after use and stripped in seconds for a full service should it ever become necessary.



The Redline Performance bar comes with adjustable back line trim. A short rear leader line positioned inside the bar end floats has 3 different knot locations allowing you to trim the rear line lengths to balance the L&R rear line lengths or to optimize your bar for different kites

How does the 'Click-it' quick release work?

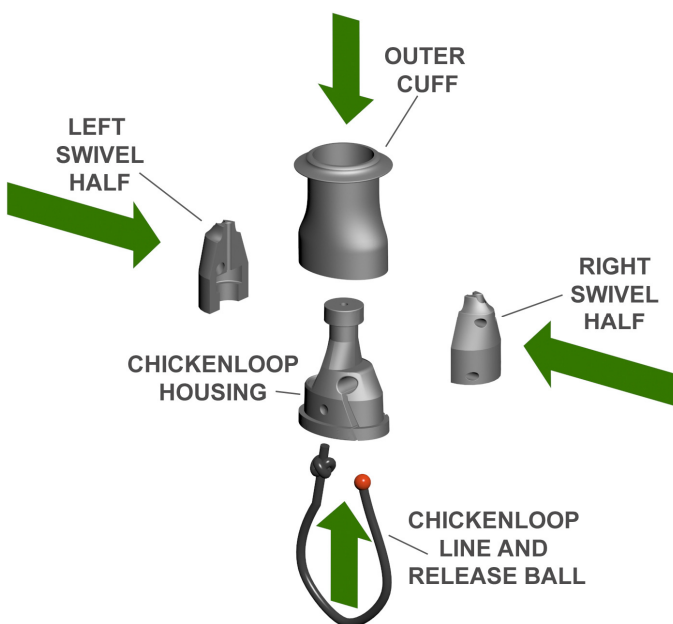

The chickenloop is comprised of 3 main parts, outer cuff, swivel and chickenloop housing. The chickenloop housing is a composite moulded part that consists of a main body part with a small, flexible hinged section.

The swivel is made of two parts that are screwed together over the extended neck of the chickenloop housing.

Sliding the outer cuff down over the chickenloop housing and swivel holds the chickenloop line captive by means of an incredibly simple 3D lock and key. The outer cuff is retained in this position by a low tolerance snap fit.

The release pressure of the QR is defined by the snap fit between outer cuff and chickenloop housing; this is completely independent of flying line tension and does not increase with


increased front line tension.

The chickenloop line is retained within the chickenloop housing by a simple 3-dimensional fit between the parts. The hinged section is moulded in the 'open' position so that very little load is required to separate the lock and key parts upon release.

How does this differ from other push to release systems?

The 2010 QR has been designed from the ground up to be as simple as possible, there are no mechanical parts, no metal load bearing surfaces, no pivots and no requirement for complex re-assembly. The parts fit together in such a way that contamination with salt and sand makes no difference to activation of the QR and it can be reassembled with the kite still partially powered due to the simplicity of the design and easy ergonomics of the chickenloop parts.

PUSH UP CUFF TO ACTIVATE QUICK RELEASE

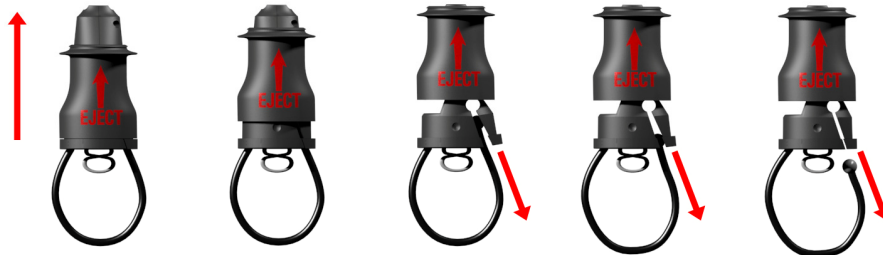

CHICKENLOOP LINE PULLED OUT BY HARNESS HOOK

Unlike many push-to-release systems the 'Click-it' QR can still be activated even if you have managed to wrap a flying line over your depower lines. The action of the QR is not inhibited by wrapping the depower lines with your flying lines as the QR cuff does not need to extend past the swivel. Additionally the swivel itself is smooth sided with an upwards taper so that if you were unlucky enough to wrap your line around the top of the swivel they will simply slide off. Should you manage to wrap your flying lines around the QR cuff the QR will still function as intended.

What is the maximum activation load for the QR?

The QR has been designed to release with less than 7 kg of upwards force; this release force has been tested significantly beyond a 150kg static load. Manufacture tolerances between moulded parts may cause the maximum release force to vary by +/- 5% in use.

What is the maximum safe working load for the chickenloop?

The chickenloop assembly has exceeded a 350kg static load test; it has not been tested beyond this range. Maximum load holding ability may vary with age and we recommend replacing the Dual-depower rope at least once every 12 months. Competition freestyle riders or riders who kite more than 500 hours per year may need to replace their chickenloop assembly more frequently than this.

How is the QR resistant against fouling?

The QR is designed so that the presence of sand and salt within the body of the chickenloop housing makes no difference to its function. The simplicity and geometry of the lock-and-key mechanism that retains the chickenloop line allows for a wide range of dimensional tolerance within the QR.

The release ball and chickenloop housing contact surfaces which support the entire front line load are very wide tolerance accuracy parts that require only a loose fit together to function. Further to this they are moulded in a semi-open position to help facilitate rapid release of the chickenloop line upon activation.

We recommend only that you rinse your QR with water before storing your bar with the QR left open in between uses.

What is the depower set-up?

The Redline Performance Bar uses an above the bar 'pull-pull' trim-strap, this gives you 22cm of on the fly depower adjustment in addition to the 55cm available through bar travel.

The Redline Performance Bar additionally includes back line adjustment knots within the bar end floats; these allow you to fine tune the trim of your kite before you launch the kite. **Users must never try to adjust the back line knots during flight serious injury could occur due to loss of steering control.**

What safety features are built into the bar?


The Redline Performance Bar uses a similar Redline safety system to the 2009 Redline bar. You attach to the Redline safety by clipping your leash into the bypass ring below the chickenloop; this remains unchanged from previous years. Once clipped into the Redline safety if you drop the bar or activate the chickenloop mounted QR the kite will switch to maximum depower instantly. Once fully depowered your kite will slowly fall to the edge of the window, taking up a position on one wingtip and await your relaunch.

The Redline safety system depowers the kite by pulling in on both front lines simultaneously; this does not completely kill the kite, or remove 100% of the power. The kite remains partially powered and ready for relaunch unless leashed to a single rear OSR handle.

The Redline safety system automatically overrides the dual-depower line stopper ball, so will function regardless of the position of the stopper ball.

Both back lines have 'OSR' handles allowing you to self land your kite in an emergency.

How has the Dual-depower stopper changed for 2010?

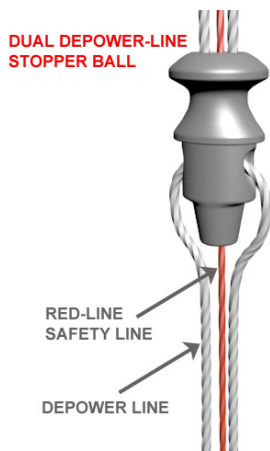


The Redline Performance Bar has a new stopper ball designed to manage all three line parts beneath the bar. The Redline safety and both left and right hand depower lines pass through the stopper.

When the bar is pushed against the stopper the depower lines are caught between the inside of the bar bushing and the tapered base of the stopper; this limits bar movement and helps reduce apparent back line tension making it easier to ride all day.

The Redline passes directly through the middle of the stopper and its passage is unaffected by the action of the stopper on the Dual depower-lines. The Redline safety functions regardless of the position of the bar and stopper.


The locking feature of the stopper can be overridden by simply giving the bar a firm push upwards, or by sliding the stopper upwards with your hand at any time. Dropping the bar or activating the 'Click-it' QR will also override the action of the depower stopper.

How do the bar component parts differ from previous models?

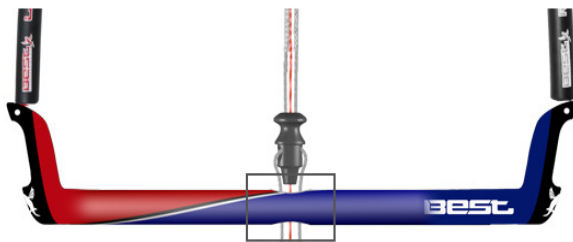

ALLOY BAR CENTER

The bar center and bushing is a new one piece aluminium forging. The center bushing easily accommodates the dual depower and Redline safety lines and has a wide, flared center that replaces the stainless bushings of previous bar designs.

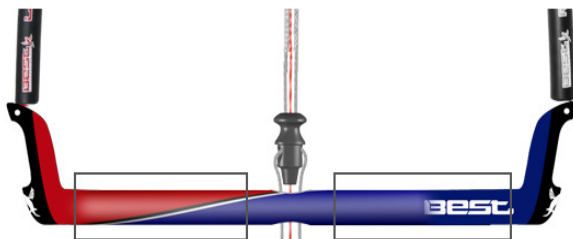

CARBON BAR TUBES


Depower line wear has almost been completely eradicated by swapping to this new part and selecting a new, smooth braided and coated dual depower line from our European flying line supplier.

What are the bar tubes made from?

The bar tubes are made from a stiff and light, spiral wound carbon and glass fibre composite.

What are the bar ends made from?

The smooth shaped bar ends are made with a composite reinforced plastic; these are glued and screwed to the bar.

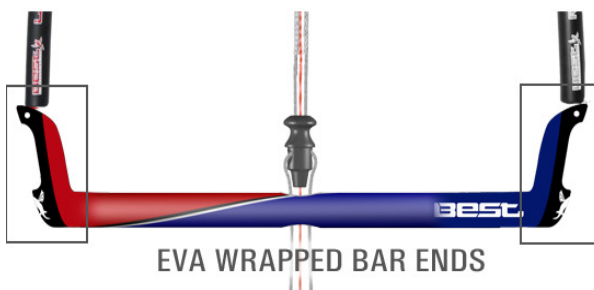

EVA WRAPPED BAR ENDS

The new bar grip is a textured EVA. The EVA covers almost the entire length of the bar and extends up onto the bar ends replacing the previous 'bar end bumper pads' to provide

exceptional comfort for unhooked riding and kitemlooping.

What spare parts are available?

Trim strap, depower line, different length chickenloop lines, outer cuffs and chickenloop housing parts will all be available as accessory parts. All moving parts on the 2010 bar are user serviceable and can easily be replaced in the field.


What line lengths does the bar use?

The bar comes equipped with 20m flying lines and a set of four 3m extension lines. The extension lines are supplied separate from the flying lines on their own winder. We strongly recommend using the 20m line length for all current kite models. The 3m extension will be useful in light wind situations and when using the bar with kites from 2009 or before. (The overall flying line length is partially compensated for by using longer leader lines than in previous years.)

Redline Performance Bar FAQ:

Q. How do I reassemble the chickenloop after activation the quick release?

A. Hold the chickenloop in one hand so that the hinged section points towards your free hand, (hold in left hand in example). Take the chickenloop line and insert it into the channel on the underside of the chickenloop assembly, push upwards until the hinge closes. Then pull the cuff down over the main body of the assembly until you here it click shut.

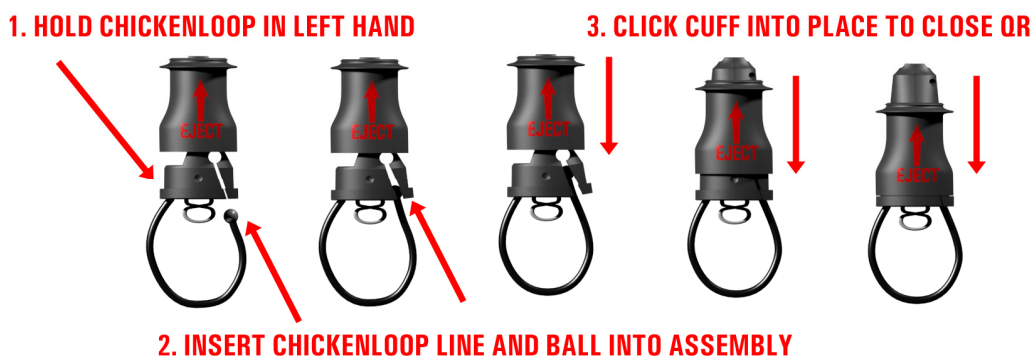

Q. What bar sizes are available?

A. 45, 50 and 55cm bars are available. A compatibility chart detailing what bar sizes best suit which sizes of all current kites can be found on the following page.

Q. How does the swivel actually work?

A. The swivel is made in two halves which are screwed together and fit over the main body of the chickenloop QR. The contact areas between these parts are smooth moulded and fitted with two low friction, replaceable, bearing inserts. These parts can be replaced at any time should you feel the performance of your swivel decrease.

The swivel extends vertically from the Click-It QR cuff towards the trim strap, and can easily be spun by hand to unwind your lines.

Q. What flying lines are used?

A. We have retained the excellent flying lines from last year's bar. However we have uprated the sleeving and replaced the leader and dual-depower lines with higher specification rope from the same company who supplies the flying lines.

Q. Can I trim my back lines while flying?


A. No. Trying that will most likely result in you crashing your kite at high speed and possibly injuring yourself. Under no circumstances, not even with assistance from a helper, should you ever attempt this. Always land your kite first.

Q. What leashing options do I have?

A. There are two safety options- standard 'Redline leash' and 'Suicide Leash'. To use the standard safety option you connect directly to the Redline safety ring beneath the chickenloop cuff as detailed below. Either unhooking and dropping the bar or activating the 'Click-it' QR will engage the Redline safety causing your kite to depower and fall from the sky.



Advanced riders who are willing to trade maximum depower for faster relaunch can choose to rig the suicide leash option, shown below. The suicide leash effectively gives a two stage release. 1st stage leaves the kite fully powered after a crash, the 2nd stage releases the kite onto the dual front line safety.

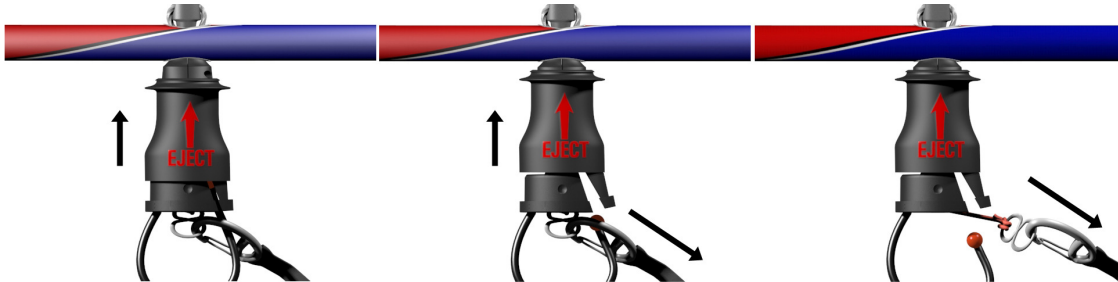

In this instance you open and then clip the karabiner over the chickenloop line and into the bypass leash ring. Attaching in this way removes the safety depower completely and a downed kite will retain its shape and hold most of its power until the 'Click-it QR' is activated.

Q. What features have you included for unhooked riding?


A. The Redline Performance Bar features a new bar center and chickenloop assembly that have a male-female fit when the bar is pulled all the way down. This ensures your chickenloop is in the right position for re-hooking.

The bar grip now extends all the way to the ends of the bar, covering the inside of the bar ends. This provides a soft contact point, making one-handed, unhooked tricks more comfortable and replaces the separate bar-end bumpers featured on the 2009 bars.


Q. Is there a Kookproof option?

A. By the time you read this the Kookproof option should be in production. The front flying lines will come rigged with a small knot in the end of the sleeved loop at the end of both the 20m and 3m sections. This knot allows you to use the ends of the front flying lines as either a 'loop' (standard) or a 'knot' (Kookproof). Riders wishing to rig Kookproof need to replace the standard front bridle pigtails on their kites with the new Kookproof accessory set.


DUAL PURPOSE KOOKPROOF/NO KOOKPROOF FRONT BRIDLE AND FLYING LINE OPTION.

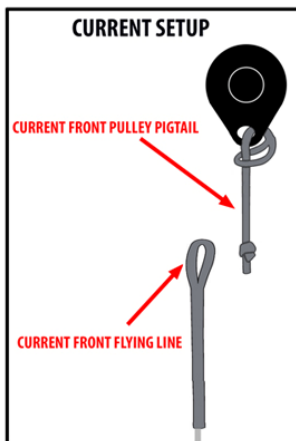

CURRENT SET-UP USES KNOTS ON ALL PIGTAILS AND LOOPS ON ALL FLYING LINES

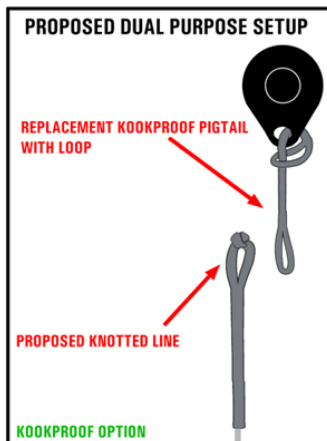

KOOKPROOF OPTION USING A FRONT FLYING LINE WITH A KNOTTED-LOOP ALLOWS IT TO BE USED WITH A KNOTTED OR LOOPED PIGTAIL. FOR KOOKPROOF OPTION RIDERS NEED ONLY SWAP FRONT BRIDLE PIGTAIL

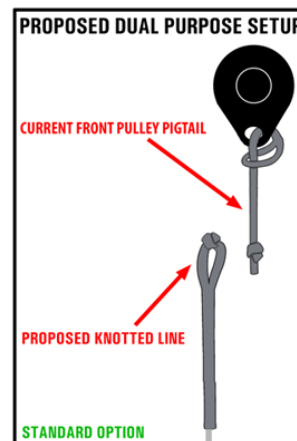

STANDARD OPTION RIDERS WHO DO NOT REQUIRE A KOOKPROOF SET-UP SIMPLY RETAIN THE STANDARD FRONT BRIDLE PIGTAIL


BACK LINES REMAIN UNCHANGED REGARDLESS OF WHICH OPTION IS SELECTED

Q. My swivel has become progressively more resistant to turning, what can I do?

A. No matter which swivel we used with the new bar we knew from experience that it would need replacing eventually. Foreign matter ingress into the swivel slowly break down the performance of the part regardless of the design used. With this in mind we designed a brand new swivel part for the Redline Performance Bar. It uses no metal parts in the friction surfaces so cannot corrode and the main bearing surfaces are lubricated with Teflon loaded bushes that can be simply replaced.

Complete disassembly of the swivel takes only a minute and requires a single 3mm allen key.


We recommend that you rinse your swivel out under a running tap after every session. Simply flush the swivel out from above and below where the Redline enters the housing, twisting the swivel as you flush it out speeds up the process and will return your swivel to its original performance. Your swivel can also be rinsed out during a session with salt water if you feel the bearing has become contaminated.

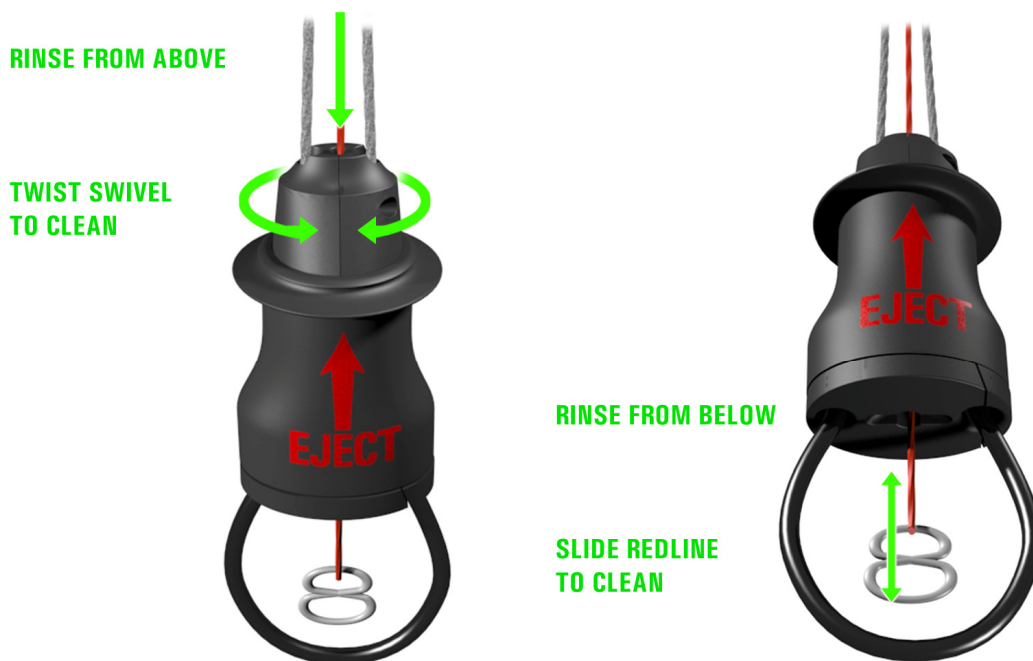

Should your swivel ever become jammed all parts of the swivel assembly and QR are available an accessory items from your local dealer.

Q. How far can I bend the hinge open to reassemble the quick release cuff?

A. At no time should you need to force the hinge open to reassemble the chickenloop and QR cuff. The hinge is designed to flex sufficiently to allow reinsertion of the chickenloop line and lockball directly without opening the hinge by hand. Forcing the hinge open by hand can deform the part and potentially lead to breakage or failure of the QR.

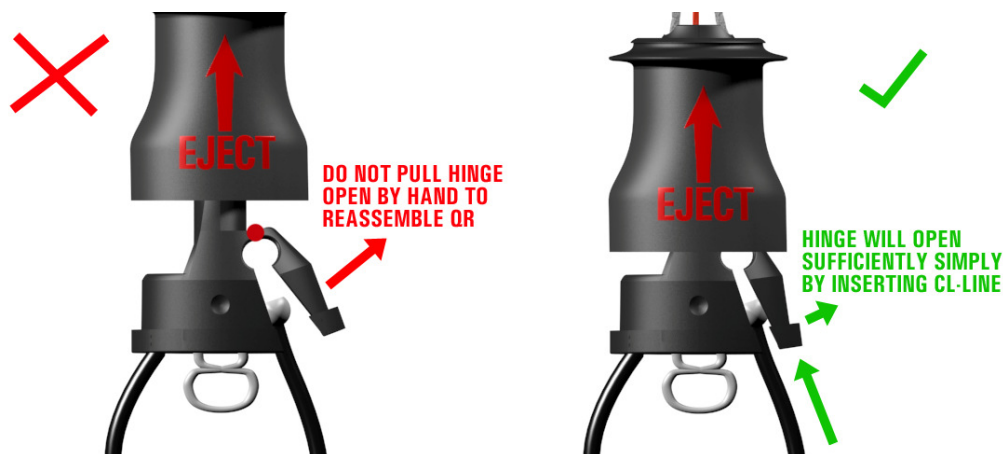


Q. what size is the chickenloop?

A. The chickenloop comes in two sizes. A standard 28cm size is provided with the bar. An increased size 32cm loop is available as an accessory item for riders who prefer a larger a loop to facilitate easier hooking and unhooking.

Q. How easy is it to fit a new chickenloop?

A. Replacement of the chickenloop can be performed in seconds. Simply bend and remove the retaining pin, shown below left, then pull the remaining small loop downwards from below. When inserting the replacement part it may help to thread a thin line over the closed loop end and pull it back into the moulded part from above.

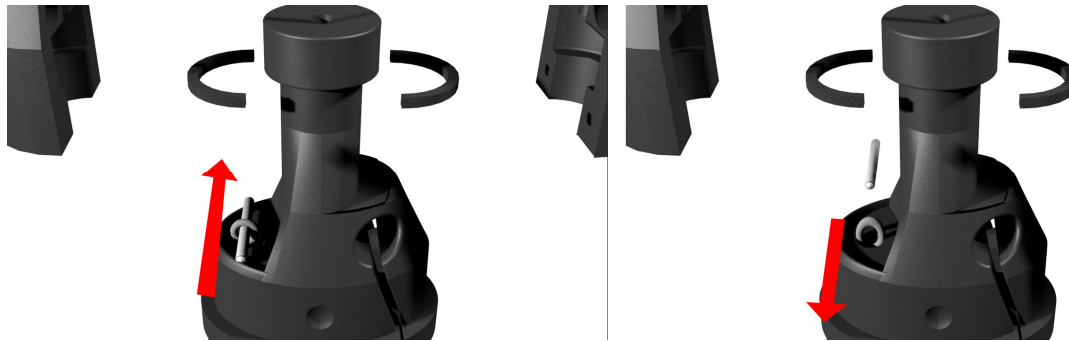




Q. Which size bar is best for my kite?

A. The 2010 kite/bar compatibility chart is given below. The stated options are given as an indication of 'best fit'. Any kite 'can' be flown on any bar but performance may be compromised by choosing those options indicated as NOT RECOMMENDED

2010 KITE/BAR COMPATIBILITY CHART

■ = BEST CHOICE ■ = ADEQUATE ■ = NOT RECOMMENDED

		5.5M	7.5M	9.5M	11.5M	13.5M				
	KAHOONA:									
	45CM	■	■	■	■	■	■	■	■	■
	50CM	■	■	■	■	■	■	■	■	■
	55CM	■	■	■	■	■	■	■	■	■
		5M	7M	9M	11M	13M	15M	17M		
	WAROO:									
	45CM	■	■	■	■	■	■	■	■	■
	50CM	■	■	■	■	■	■	■	■	■
	55CM	■	■	■	■	■	■	■	■	■
		5M	7M	9M	11M	13M	15M	17M		
	BULAROO:									
	45CM	■	■	■	■	■	■	■	■	■
	50CM	■	■	■	■	■	■	■	■	■
	55CM	■	■	■	■	■	■	■	■	■
		6M	8M	10M	12M	14M				
	HXG:									
	45CM	■	■	■	■	■	■	■	■	■
	50CM	■	■	■	■	■	■	■	■	■
	55CM	■	■	■	■	■	■	■	■	■

2010 Bar calibration chart is on page following.

CALIBRATION BEST BAR 2010

